



ROLLER DOOR

Mini 52


Maximum width	320 cm
Minimum width	100 cm
Maximum height	
Aluminium box 205	250 cm
Aluminium box 250	380 cm
Maximum surface area	9 m²
Aluminium overhead	6,6 cm
Insulated aluminium profile	52
Profile height	5,2 cm
Profile thickness	1,3 cm
Curtain weight	3,1 kg/m ²
Manual drive (from 100 cm total width)	Lock + spring
Electric drives (from 100 cm total width)	Polfendo / Somfy




Application

Small shelters, garden houses, bicycle sheds, quad garages, shopfront covers, small storage boxes, etc. Unheated rooms.

Standard colours

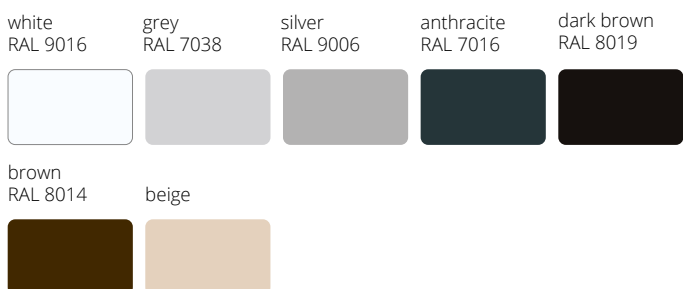


Special colours (surcharge 20%)

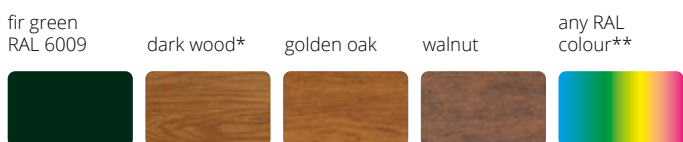

** Painting of elements: box 10%, bottom strip 5%, guides 5%

* just armor

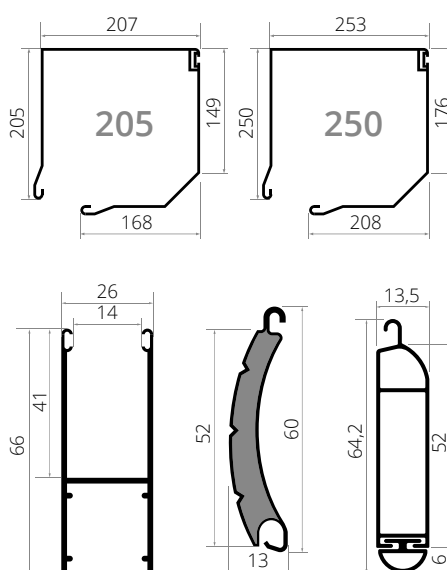

Information

After retrofitting with a photo-optical strip and an inertial brake, we obtain a garage door suitable for automatic operation. The standard equipment includes a control unit + 2 remote controls; during operation, the user acts as the safety measure.

Mini 55 EVO


Maximum width	400 cm
Minimum width	100 cm
Maximum height	
Aluminium box 250	300 cm
Aluminium box 300	380 cm
Maximum surface area	12 m²
Aluminium overhead	7,5 cm
Insulated aluminium profile	55
Profile height	5,5 cm
Profile thickness	1,4 cm
Curtain weight	3,5 kg/m ²
Manual drive (from 100 cm total width)	Lock + spring
Electric drives (from 100 cm total width)	Polfendo / Somfy




Application

Small shelters, garden houses, bicycle sheds, quad garages, shopfront covers, small storage boxes, etc. Unheated rooms.

Standard colours

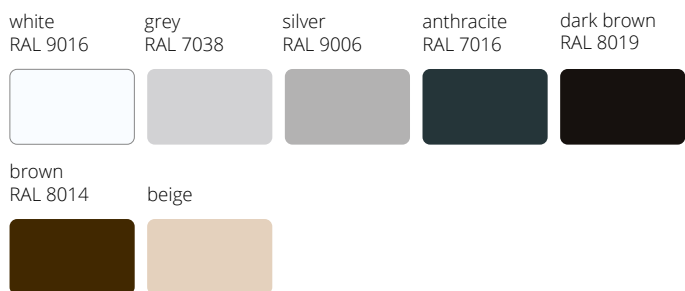


Special colours (surcharge 20%)

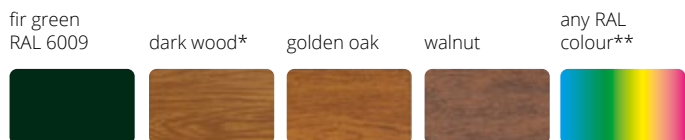

** Painting of elements: box 10%, bottom strip 5%, guides 5%

* just armor

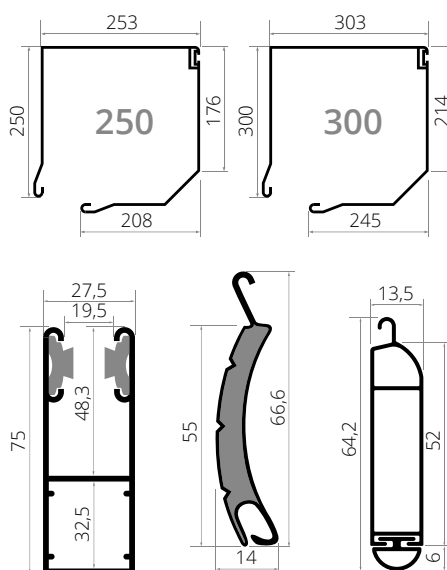

Information

After retrofitting with a photo-optical strip and an inertial brake, we obtain a garage door suitable for automatic operation. The standard equipment includes a control unit + 2 remote controls; during operation, the user acts as the safety measure.

Mini 77 EVO



Maximum width	350 cm
Minimum width	100 cm
Maximum height	
Aluminium box 250	200 cm
Aluminium box 300	285 cm
Maximum surface area	10,5 m²
Aluminium box	25 / 30 cm
Aluminium sides	25 / 30 cm
Aluminium overhead	9 cm
Insulated aluminium profile	PD77
EasyLook profile	EasyLook 77
Ventilation profile	WENT 77
Profile height	7,7 cm
Profile thickness	1,8 cm
Curtain weight	3,5 kg/m ²
Drives (from 100 cm total width)	Polfendo / Somfy / GFA



Application

Small shelters, garden houses, bicycle sheds, quad garages, shopfront covers, small storage boxes, etc. Unheated rooms.

Standard colours

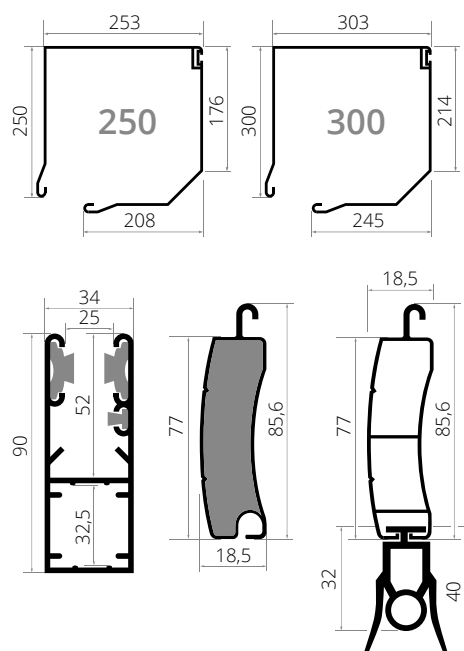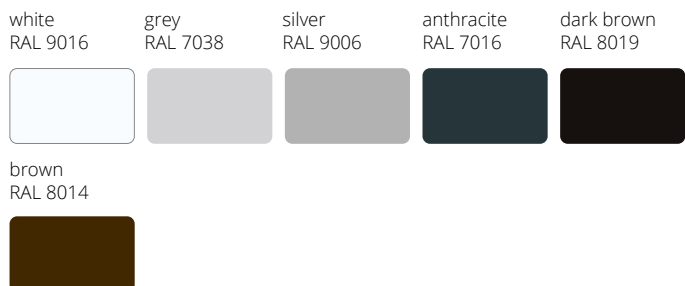

Information

After retrofitting with a photo-optical strip and an inertial brake, we obtain a garage door suitable for automatic operation. The standard equipment includes a control unit + 2 remote controls; during operation, the user acts as the safety measure.

Guard 77 EVO

Maximum width	450 cm
Maximum height	
Aluminium box 250	200 cm
Aluminium box 300	300 cm
Aluminium box 360	360 cm
Maximum surface area	16,2 m²
Aluminium box	30 / 36 cm
Aluminium / steel sides	30 / 36 cm
Aluminium overhead	9 cm
Insulated aluminium / steel profile (for RAL colours)	77
EasyLook profile	EasyLook 77
Ventilation profile	WENT 77
Profile height	7,7 cm
Profile thickness	1,8 cm
Curtain weight	5,5 kg/m ²
Drives (from 100 cm total width)	Polfendo / Somfy



Application

Garages, industrial and warehouse buildings. Unheated rooms.
The gate is equipped with a phot-optical strip and an inertial brake, designed for automatic operation.

Standard colours

white RAL 9016	grey RAL 7038	silver RAL 9006	anthracite RAL 7016	dark brown RAL 8019
brown RAL 8014	beige	cream	golden oak	walnut

Special colours (surcharge 20%)

black RAL 9005	mahogany	alux DB 703	irish oak*	dark wood*
blue RAL 5010	navy blue RAL 5011	moss green RAL 6005	fir green RAL 6009	purple RAL 3004


any RAL
colour**



If you choose RAL-coloured painting, you will get a gate with a steel insulated profile 77.

** Painting of elements: box 10%, bottom strip 5%, guides 5%.

* just armor

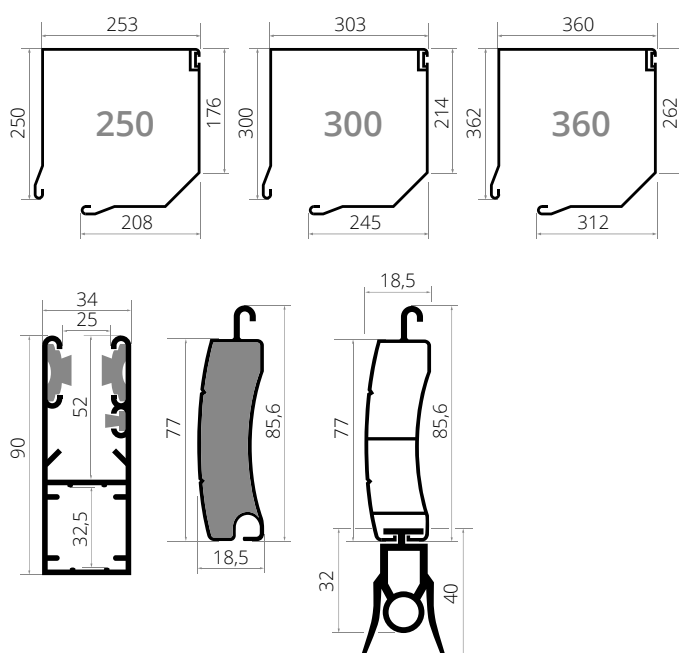

Intense 77 EVO

Maximum width

Aluminium overhead 9 cm 450 cm

Aluminium overhead 9 cm + storm hooks 640 cm

Maximum height

Aluminium box 300 300 cm

Aluminium box 300 at width over 450 cm 260 cm

Aluminium box 360 410 cm

Aluminium box 400 510 cm

Steen wall bracketse 58 cm 600 cm

Maximum surface area 36 m²

Aluminium sides 30 cm

Steen sides with wall brackets 36 / 40 cm

Wall brackets 58 cm

Insulated aluminium profile up to 640 cm, steel profile up to 350 cm 77

EasyLook profile EasyLook 77

Ventilation profile WENT 77

Profile height 7,7 cm

Profile thickness 1,8 cm

Curtain weight 5,5 kg/m²


Drives (from 100 cm total width) Polfendo / Somfy




Application

Garages, industrial facilities, and warehouses with increased usage frequency. The gate is equipped with a phot-optical strip and an inertial brake, designed for automatic operation.

Standard colours

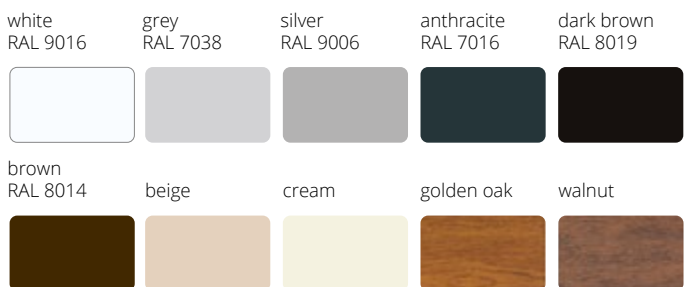

Special colours (surcharge 20%)

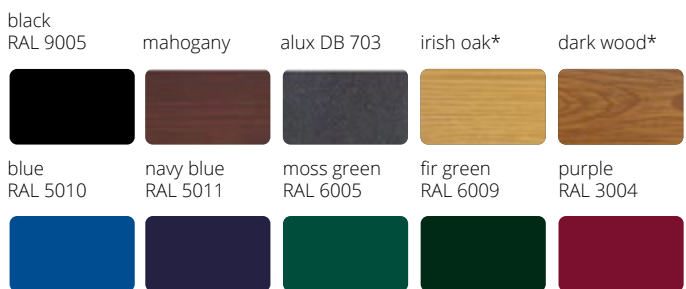


any RAL colour**



Steel profile, any RAL colour, max. 350 cm length. Gates with ther width of 640 cm and above do not come in woodgrain colours, but only in RAL colours, without surcharges.

** Painting of elements: box 10%, bottom strip 5%, guides 5%.

* just armor

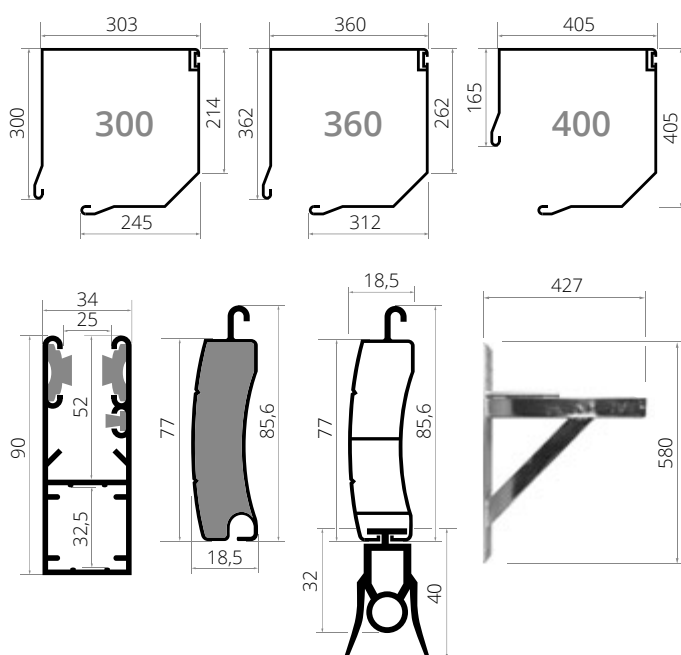

Factory 77

Maximum width

Aluminium overhead 9 cm + wall brackets	710 cm*
Aluminium overhead 9 cm + box	600 cm

Maximum height

Aluminium box 300	300 cm
Aluminium box 300 at width over 450 cm	260 cm
Aluminium box 360	410 cm
Aluminium box 400	510 cm
Travelling steel wall brackets	600 cm

Maximum surface area **40 m²**

Aluminium sides	30 cm
Steel sides	36 / 40 cm
Travelling wall brackets	58 cm
Extruded aluminium profile	77
EasyLook profile	EasyLook 77
Ventilation profile	WENT 77
Profile height	7,7 cm
Profile thickness	1,8 cm
Curtain weight	9 kg/m²
Drives (from 100 cm total width)	Polfendo / Somfy / GFA



Application

Doors designed for industrial use, suitable for heavy-duty operation. For unheated rooms.

Standard colours

grey


RAL*



* Schaft and opener hosting can be made for an extra charge.

Information

The gate is equipped with a phot-optical strip and an inertial brake, designed for automatic operation.

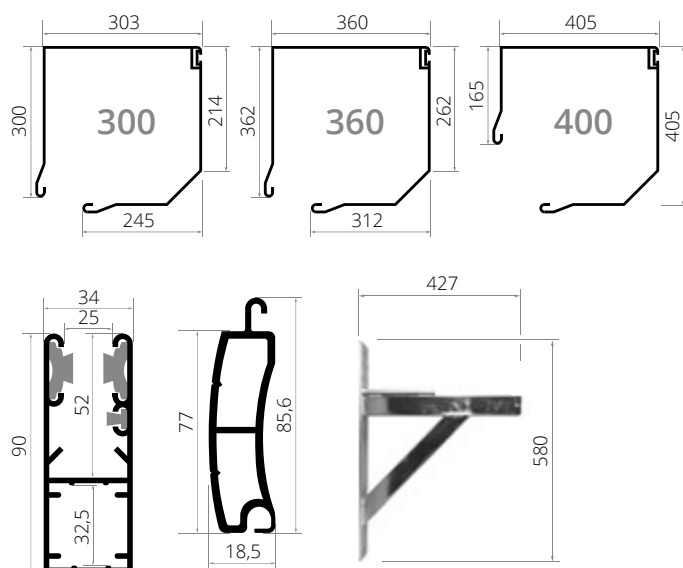

ROLLER DOOR

Intense 100 EVO

Maximum width

Aluminium overhead 150 cm + storm hooks 700 cm

Maximum height

Steel wall brackets 58 cm 758 cm

Maximum surface area **52,7 m²**

Wall brackets 58 cm

Profile height 10 cm

Profile thickness 2,5 cm

Curtain weight 6,8 kg/m²

Drives (from 100 cm total width) GFA



Application

Doors designed for industrial use, suitable for heavy-duty operation. For unheated rooms.

Standard colours

white
RAL 9016



grey
RAL 7038



silver
RAL 9006



anthracite
RAL 7016



dark brown
RAL 8019




brown
RAL 8014



Information

The gate is equipped with a phot-optical strip and an inertial brake, designed for automatic operation.

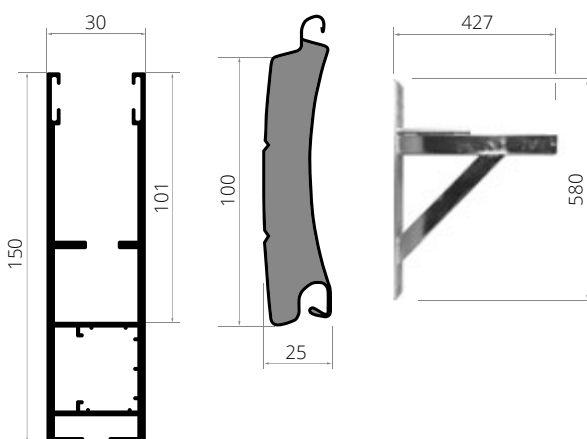

Comparison table

	Mini 52	Mini 55	Mini 77	Guard 77	Intense 77	Factory 77	Intense 100
Max. width	320 cm	400 cm	350 cm	450 cm	640 cm	710 cm	700 cm
Max. height	380 cm	380 cm	285 cm	360 cm	600 cm	600 cm	758 cm
Max. surface area	9 m ²	12 m ²	10,5 m ²	16,2 m ²	36 m ²	40 m ²	52,7 m ²
Profile height	5,2 cm	5,5 cm	7,7 cm	7,7 cm	7,7 cm	7,7 cm	10 cm
Profile thickness	1,3 cm	1,4 cm	1,8 cm	1,8 cm	1,8 cm	1,8 cm	2,5
Profile weight	3,1 kg/m ²	3,5 kg/m ²	3,5 kg/m ²	5,5 kg/m ²	5,5 kg/m ²	9 kg/m ²	6,8 kg/m ²
Wind load resistance	-	-	-	2	4	4	4
Waterproofing	2						
Colours	11	11	7	20	20	RAL	6
Drives	• manual • Polfendo • Somfy	• manual • Polfendo • Somfy	• Polfendo • Somfy	• Polfendo • Somfy	• Polfendo • Somfy • GFA	• Polfendo • Somfy • GFA	• GFA

Controls and extras (at extra charge)

	Polfendo		Somfy	GFA	
	Polfendo Ecoline control unit + 2 four-channel remote controls	Polfendo Proline control unit + 2 four-channel remote controls	Rollixo Optimo RTS control unit + 2 four-channel remote controls	TS970 control unit	TS971 control unit with radio control
remote control included	✓	✓	✓	✗	✓
photocell	✗	✓	✓	✓	✓
inertial brake	✗	✓	✗	✓	✓
photo-optical strip	✗	✓	✗	✓	✓
warning lamp	✗	✓	✓	✓	✓
semaphore	✗	✗	✗	✓	✓
key switch	✗	✓	✓	✓	✓
radio keyboard	✗	✗	✓	✗	✗

- ✓ included in the control system price
- ✓ at an additional cost
- ✓ an additional cost, required for the construction to function as a garage door rather than a roller shutter
- ✗ retrofitting not possible